


CV810T10S

8" 10 oz full range cone driver /
10W transformer / square baffle

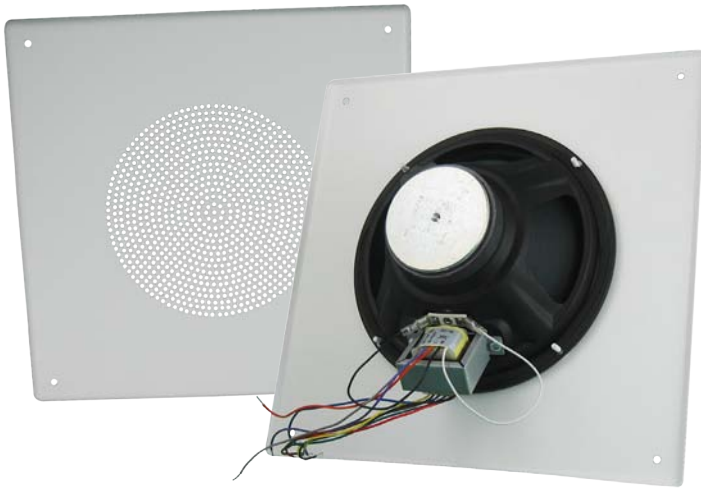

key features:

speaker/transformer/baffle assembly ready for installation
10W multi-tap 25/70 volt line matching transformer
includes standard four-stud baffle grille
ridged "polycoat"® cone for enhanced frequency response

key applications:

retrofit projects
background music and paging for retail space or office
school and hospitality environments
healthcare or institutional communications

specifications: CV810T10S

Voice coil size	1" (25mm), 10 oz magnet
Voice coil material	copper
Voice coil insulation	polyester
Voice coil former	paper
Driver type	full range driver
Cone material	polycoat® treated paper
Sensitivity @ 8Ω	96dB @ 1 watt, 1 meter
Max power	10W
Nominal impedance	25V 0.62, 1.25, 2.5, 5, 10W 70V 0.62, 1.25, 2.5, 5W, 10W
Frequency range	60Hz / 15kHz ± 3dB
Speaker basket	stamped steel
Termination type	color coded tined leads

description:

The CV810T10S is a complete ceiling speaker assembly that consists of a Convex CV810 8" full range driver consisting of a 1" copper voice coil, a CVT10 10 watt 25/70 volt multi-tap transformer and a CVB8S square metal baffle. The CV810T10S produces a smooth response that is perfect for paging and background music systems. This speaker is manufactured of a polycoated driver that will provide years of trouble free service, even in harsh environments. Assembled in Canada.

support hardware:

CVTS tile supports
CVBB8SF flush mount back box
CVBB8SS surface mount back box

physical dimensions:

Dimensions	8" (203 mm) diameter 3.875" (98 mm) deep
Minimum cutout	7.25" (184 mm)

Convex audio/video equipment distributed by:
Martech - driving strategic sales
11565 - 149 Street
Edmonton, Alberta, Canada
T5M 1W9

phone: 780-454-2006
www.drivingstrategicsales.com



CV810T10S

8" 10 oz full range cone driver /
10W transformer / square baffle

architect's specifications:

The 8" loudspeakers shall be Convex model CV810T10S. These speaker/transformer/baffle assemblies will include a 10W multi-tap transformer mounted with machine screws and terminated to speaker using removable spade lugs. They shall have a frequency response of 60Hz to 15kHz \pm 3dB utilizing a 1" voice coil. The 25/70V transformer will have the following tap settings marked by color codes:

25V 0.62W, 1.25W, 2.5W, 5W, 10W

70V 0.62W, 1.25W, 2.5W, 5W, 10W with an insertion loss of less than 2dB.

The baffle shall be a square metal baffle with four holes for mounting the assembly to a back box. Baffles with 8 holes are not acceptable. CV810T10S speaker assembly shall mount to a CVBB8SF flush mount or CVBB8SS surface mount back boxes.

Convex customer service: 1-800-461-0006
www.convexav.com

Convex audio/video equipment distributed by:
Martech - driving strategic sales
11565 - 149 Street
Edmonton, Alberta, Canada
T5M 1W9

phone: 780-454-2006
www.drivingstrategicsales.com

